

Benefits

- Super bright, extremely powerful illumination at 167lm/w
- Aluminium heatsink delivers excellent heat dissipation
- Extra long lifespan of 50,000 hours
- An ideal solution for up lighting in general lighting applications

Application




| Model | Item Description | W | PF | lm | lm/W | CRI | Beam Angle | Lifespan | Single Box (LxWxH)mm | Outer Box (LxWxH)mm | Packing Qty (PCS/CTN) |
|----------------|-------------------------------|-----|-----|------|------|-----|------------|----------|----------------------|---------------------|-----------------------|
| YTT8AA4-15W-S | PROV1 T8 15W G13 3000K 4FT S | 15 | 0.9 | 2500 | 167 | >80 | 270° | 50000 | 1225*33*33 | 1240*190*157 | 20 |
| YTT8AA4-15W-S | PROV1 T8 15W G13 4000K 4FT S | 15 | 0.9 | 2500 | 167 | >80 | 270° | 50000 | 1225*33*33 | 1240*190*157 | 20 |
| YTT8AA4-15W-S | PROV1 T8 15W G13 6500K 4FT S | 15 | 0.9 | 2500 | 167 | >80 | 270° | 50000 | 1225*33*33 | 1240*190*157 | 20 |
| YTT8AA4-7.5W-S | PROV1 T8 7.5W G13 3000K 2FT S | 7.5 | 0.9 | 1250 | 167 | >80 | 270° | 50000 | 625*33*33 | 640*190*157 | 20 |
| YTT8AA4-7.5W-S | PROV1 T8 7.5W G13 4000K 2FT S | 7.5 | 0.9 | 1250 | 167 | >80 | 270° | 50000 | 625*33*33 | 640*190*157 | 20 |
| YTT8AA4-7.5W-S | PROV1 T8 7.5W G13 6500K 2FT S | 7.5 | 0.9 | 1250 | 167 | >80 | 270° | 50000 | 625*33*33 | 640*190*157 | 20 |

NEW

| Application Conditions | |
|-------------------------|----------|
| IP | IP20 |
| Operating Temperature | -20~40°C |
| Application Temperature | 25°C |
| Storage Environment | -25~50°C |

| Mechanical Properties | |
|-----------------------|-------|
| Optical Material | PC |
| Housing Material | AL |
| Finishing Colour | White |

| Electrical Supply | |
|-------------------|---------|
| Frequency (Hz) | 50/60 |
| Voltage (V) | 220-240 |
| AC/DC | AC |

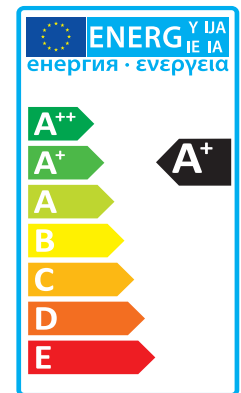

Dimensional Drawing

