



## MEGAMAN® DIMMBAY

### LED High Bay

Megaman® DIMMBAY is a high light efficacy LED high bay, Round LED high bay lights offer a great alternative to traditional metal halides. fixtures can have hook-type mounting for easy fixture upgrades or can be wired with energy-saving sensors with a plug and cord as an option. The product family offers wide product ranges, competitive enough specification with long-term quality and reliability, covering most of the potential industrial applications.

### Product Features

- High system efficacy up to 190lm/W
- Microwave motion sensor is optional
- 0 ~ 10v dimmer is optional
- Emergency kit is optional
- Suitable for hook, pipe and bracket mounting



### Product Benefits

0-10V dimming, remote control, can be equipped with lights



### Applications


- ✗ Warehouse
- ✗ Factory
- ✗ Exhibition Hall
- ✗ Logistic Center
- ✗ High Ceiling Lounge



## General Information

Input Voltage / Frequency	100-277 VAC~ 50/60Hz
Power Factor	>0.95
Dimmability	Non-Dim or Dim
CRI	>Ra80
Colour Consistency	≤6
Lifetime	50000hrs L70B50@Ta25°C
IP	IP65
Protection Class	CL I
Glow Wire	850
Flickering Percentage	N/A
Material & Colour	Aluminium+Polycarbonate
Installation	Suspension

## Photometric Data

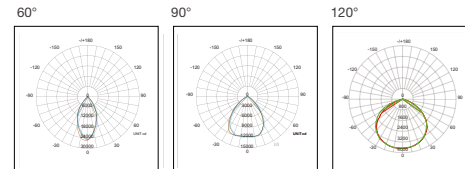

60/90/120°  
Beam Angle



100-277V  
Input Voltage



50000hrs  
Long Lifespan

Model No.	Wattage (W)	Luminous Flux (lm)	Luminous Efficacy (lm/W)	Dimension (D*H mm)	Beam Angle (°)	Power Factor (λ)
GDXL1033	100	17000[3000K] 19000[4000K/6500K]	170[3000K] 190[4000K/6500K]	Ø248*129	60 / 90 / 120	0.95
GDXL1033	150	25500[3000K] 28500[4000K/6500K]	170[3000K] 190[4000K/6500K]	Ø295*140	60 / 90 / 120	0.95
GDXL1033	200	34000[3000K] 38000[4000K/6500K]	170[3000K] 190[4000K/6500K]	Ø320*154	60 / 90 / 120	0.95
GDXL1033	240	40800[3000K] 47500[4000K/6500K]	170[3000K] 190[4000K/6500K]	Ø320*154	60 / 90 / 120	0.95

## Dimensional Drawing

